



PRODUCT USER MANUAL

NRT IASI Dust Optical Depth HDF5

Prepared by: Rosa Astoreca
Daniel Hurtmans
Lieven Clarisse
Pierre Coheur
Juliette Hadji-Lazaro
Sarah Safieddine
Cathy Clerbaux

Université Libre de Bruxelles, Belgium
Université Libre de Bruxelles, Belgium
Université Libre de Bruxelles, Belgium
Université Libre de Bruxelles, Belgium
LATMOS, France
LATMOS, France
LATMOS, France

DOCUMENT STATUS SHEET

Issue	Date	Modified items/Reason for change
1.0	06/02/2025	First version of the Dust PUM produced for the back-up dissemination of the product in demonstrational mode. Not reviewed.
1.1	26/06/2025	New PUM for the HDF5 NRT Dust product. Not reviewed.

RELATED PRODUCT LIST

Product ID	Product name	Platform
O3M-372, O3M-430	IASI NRT Dust	Metop-B, Metop-C

TABLE OF CONTENTS

1. INTRODUCTION	4
1.1 Purpose and scope	4
1.2 Acronyms	4
1.3 Applicable and reference documents	4
1.3.1 Applicable documents	4
1.3.2 Reference documents	4
2. INTRODUCTION TO EUMETSAT SATELLITE APPLICATION FACILITY ON ATMOSPHERIC COMPOSITION MONITORING (AC SAF)	6
3. IASI DUST RETRIEVAL ALGORITHM.....	7
3.1 IASI instrument	7
3.2 Dust algorithm overview	7
4. IASI LEVEL 2 NRT DUST PRODUCT	9
4.1 HDF5 file name convention	9
4.2 NetCDF file size estimate	9
4.3 Content of the NetCDF file	9
5. THE DUST PRODUCT	10
5.1 Product description.....	10
5.2 Using the product	10
5.2.1 General quality flag	10
5.2.2 Data filtering.....	10
5.3 Product requirements	11
5.4 Product dissemination and archiving	11
5.4.1 NRT Product dissemination.....	11
5.4.2 Archive retrieval	11

1. INTRODUCTION

1.1 Purpose and scope

This document is the Product User Manual for the IASI NRT Dust HDF5 product retrieved within the context of the Satellite Application Facility on Atmospheric Composition Monitoring (AC SAF). This document gives a brief overview on the IASI Dust retrieval algorithm and explains how to use and interpret the IASI Dust product.

This document has been written as LODI v20220522 was running at EUMETSAT.

1.2 Acronyms

AC SAF: Atmospheric Composition Monitoring Satellite Application Facility
EUMETSAT: European Organisation for the Exploitation of Meteorological Satellites
EUMETCast: EUMETSAT multi-service data dissemination system
HDF5: Hierarchical Data Format
IASI: Infrared Atmospheric Sounding Interferometer
ULB: Université libre de Bruxelles
LATMOS: Laboratoire Atmosphères, Observations Spatiales

1.3 Applicable and reference documents

1.3.1 Applicable documents

- [AD1] IASI Dust Algorithm Theoretical Basis Document SAF/AC/ULB/Dust_ATBD Issue 1.2, 10/12/2024
- [AD2] IASI Dust Product Specification, Requirement and Assessment SAF/AC/ULB/ Dust_PSRA Issue 1.1, 24/02/2022
- [AD3] Product Requirements Document SAF/AC/FMI/RQ/PRD/001 Issue 2.2, 20/12/2023

1.3.2 Reference documents

- [RD1] Hilton, F.; August, T.; Barnet, C.; Bouchard, A.; Camy-Peyret, C.; Clarisse, L.; Clerbaux, C.; Coheur, P.-F.; Collard, A.; Crevoisier, C.; Dufour, G.; Edwards, D.; Faijan, F.; Fourrié, N.; Gambacorta, A.; Gauguin, S.; Guidard, V.; Hurtmans, D.; Illingworth, S.; Jacquinet-Husson, N.; Kerzenmacher, T.; Klaes, D.; Lavanant, L.; Masiello, G.; Matricardi, M.; McNally, T.; Newman, S.; Pavelin, E.; Péquignot, E.; Phulpin, T.; Remedios, J.; Schlüssel, P.; Serio, C.; Strow, L.; Taylor, J.; Tobin, D.; Uspensky, A. and Zhou, D.: Hyperspectral Earth Observation with IASI. *Bull. Am. Meteorol. Soc.*, 93(3), 347-370, doi: 10.1175/BAMS-D-11-00027.1, 2012.

- [RD2] Camy-Peyret, C. & Eyre, J. The IASI Science Plan. Technical report, A Report From The IASI Sounding Science Working Group, 1998.
- [RD3] Clerbaux, C.; Boynard, A.; Clarisse, L.; George, M.; Hadji-Lazaro, J.; Herbin, H.; Hurtmans, D.; Pommier, M.; Razavi, A.; Turquety, S.; Wespes, C. & Coheur, P. F. Monitoring of atmospheric composition using the thermal infrared IASI/MetOp sounder. *Atmos. Chem. Phys.*, 9(16):6041-6054, 2009.
- [RD4] Clarisse, L., Clerbaux, C., Franco, B., Hadji-Lazaro, J., Whitburn, S., Kopp, A., Hurtmans, D., & Coheur, P.-F. A decadal data set of global atmospheric dust retrieved from IASI satellite measurements. *J. Geophys. Res.: Atm.*, 124. <https://doi.org/10.1029/2018JD029701>, 2019
- [RD5] Whitburn, S., Damme, M. V., Clarisse, L., Bauduin, S., Heald, C. L., Hadji-Lazaro, J., & Coheur, P.-F. A flexible and robust neural network IASI-NH3 retrieval algorithm. *J. Geophys. Res.: Atm.*, 121. <https://doi.org/10.1002/2016JD024828>, 2016
- [RD6] EUMETCast Dissemination facility : <https://user.eumetsat.int/catalogue>

2. INTRODUCTION TO EUMETSAT SATELLITE APPLICATION FACILITY ON ATMOSPHERIC COMPOSITION MONITORING (AC SAF)

Background

The monitoring of atmospheric chemistry is essential due to several human caused changes in the atmosphere, like global warming, loss of stratospheric ozone, increasing UV radiation, and pollution. Furthermore, the monitoring is used to react to the threats caused by the natural hazards as well as follow the effects of the international protocols.

Therefore, monitoring the chemical composition and radiation of the atmosphere is a very important duty for EUMETSAT and the target is to provide information for policy makers, scientists and general public.

Objectives

The main objectives of the AC SAF is to process, archive, validate and disseminate atmospheric composition products (O_3 , NO_2 , SO_2 , BrO, HCHO, H_2O , OClO, CO, NH_3), aerosol products and surface ultraviolet radiation products utilising the satellites of EUMETSAT. The majority of the AC SAF products are based on data from the GOME-2 and IASI instruments onboard Metop satellites.

Another important task besides the near real-time (NRT) and offline data dissemination is the provision of long-term, high-quality atmospheric composition products resulting from reprocessing activities.

Product categories, timeliness and dissemination

NRT products are available in less than three hours after measurement. These products are disseminated via EUMETCast, WMO GTS or internet.

- Near real-time trace gas columns (total and tropospheric O_3 and NO_2 , total SO_2 , total HCHO, CO) and high-resolution ozone profiles
- Near real-time absorbing aerosol indexes from main science channels and polarization measurement detectors
- Near real-time UV indexes, clear-sky and cloud-corrected

Offline products are available within two weeks after measurement and disseminated via dedicated web services at EUMETSAT and AC SAF.

- Offline trace gas columns (total and tropospheric O_3 and NO_2 , total SO_2 , total BrO, total HCHO, total H_2O) and high-resolution ozone profiles
- Offline absorbing aerosol indexes from main science channels and polarization measurement detectors
- Offline surface UV, daily doses and daily maximum values with several weighting functions

Data records are available after reprocessing activities from the EUMETSAT Data Centre and/or the AC SAF archives.

- Data records generated in reprocessing
- Lambertian-equivalent reflectivity
- Total OClO

Users can access the AC SAF offline products and data records (free of charge) by registering at the AC SAF web site.

More information about the AC SAF project, products and services: <https://acsaf.org/>

AC SAF Helpdesk: helpdesk@acsaf.org

Twitter: https://twitter.com/Atmospheric_SAF

3. IASI DUST RETRIEVAL ALGORITHM

3.1 IASI instrument

IASI is an infrared Fourier transform spectrometer developed jointly by CNES (the French spatial agency) with support of the scientific community (for a review see [RD1]), and by EUMETSAT. IASI is mounted on-board the European polar-orbiting Metop satellites with the primary objective to improve numerical weather predictions, by measuring tropospheric temperature and humidity with high horizontal resolution and sampling, with 1 km vertical resolution, and with respectively 1 K and 10% accuracy [RD2]. IASI also contributes to atmospheric composition measurements for climate and chemistry applications [RD3]. To reach these two objectives, IASI measures the infrared radiation of the Earth's surface and of the atmosphere between 645 and 2760 cm^{-1} at nadir and along a 2200 km swath perpendicular to the satellite track. A total of 120 views are collected over the swath, divided as 30 arrays of 4 individual Field-of-views (FOVs) varying in size from $36 \times \pi\text{ km}^2$ at nadir (circular 12 km diameter pixel) to $10 \times 20 \times \pi\text{ km}^2$ at the larger viewing angle (ellipse-shaped FOV at the end of the swath). IASI offers in this standard observing mode global coverage twice daily, with overpass times at around 9:30 and 21:30 mean local solar time. The very good spatial and temporal sampling of IASI is complemented by fairly high spectral and radiometric performances: the calibrated level 1C radiances are at 0.5 cm^{-1} apodized spectral resolution (the instrument achieves a 2 cm optical path difference), with an apodized noise that ranges below 2500 cm^{-1} between 0.1 and 0.2 K for a reference blackbody at 280 K [RD1].

3.2 Dust algorithm overview

The algorithm is based on (1) a sensitive hyperspectral dust index (R) and (2) the conversion of this index to dust optical depth (DOD) at $10\text{ }\mu\text{m}$. The dust index is derived from a Jacobian, encompassing a typical infrared dust signature and a covariance matrix, derived from spectra without observable quantities of dust. The conversion to optical depths (ODs) relies on a neural network (NN), trained from a database of synthetic spectra, a CALIPSO dust climatology and IASI L2 meteorological data (pressure, temperature, humidity profiles). The NN output is a conversion ratio (CR) by which the R value should be multiplied to get DOD, that is $\text{DOD} = \text{R} \times \text{CR}$. The algorithm description is given in the Dust ATBD [AD1] and in [RD4].

Atmospheric dust optical depth (DOD) retrieval framework

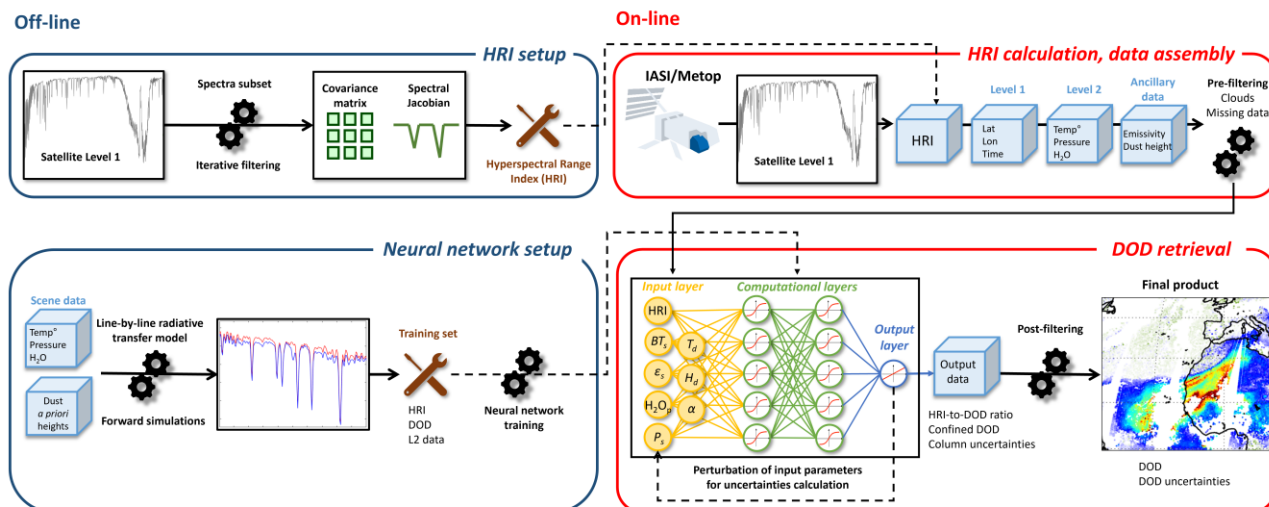


Figure 1: Flowchart showing the IASI atmospheric dust optical depth retrieval framework.

4. IASI LEVEL 2 NRT DUST PRODUCT

4.1 HDF5 file name convention

The names of the IASI Level 2 Dust products distributed on EUMETCast follow this example:

W_XX-EUMETSAT- Darmstadt,SOUNDING+SATELLITE,METOP*+IASI_C_EUMP_
yyyymmddhhmmss_nnnnn_ACSAF_LODI_12.h5

where:

yyyymmdd	the UTC year, month, day of the data start sensing time
hhmmss	the UTC hour, minute, second of the data start sensing time
nnnnn	the orbit number
*	B, C

4.2 HDF5 file size estimate

The size of the output may vary and is on average 28 M with a number of 480 files per day per instrument.

4.3 Content of the HDF5 file

This table describes variables included in the IASI Level 2 NRT Dust HDF5 files.

Table 1: Variables name and description

Variables name in HDF5 file	Variables location
longitude	/location/longitude
latitude	/location/latitude
time	/location/time
date	/location/date
orbit	/location/orbit
scanline	/location/scanline
general quality flag (gqf)	/fitted/diagnostics/QFLAG
BDIV	/fitted/diagnostics/BDIV
Dust_z	/fitted/altitude
Dust_OD	/fitted/OD
Dust_Err	/fitted/OD error

5. THE DUST PRODUCT

5.1 Product description

The Dust product includes several variables, described in Table 1 and in Table 2. The principal product is a Dust plume optical depth and an estimated error on this optical depth, together with the climatological altitude of the dust plume. A $1^\circ \times 1^\circ$ monthly climatology of dust altitudes was built from the Cloud-Aerosol Lidar and Infrared Pathfinder Satellite Observation 5-km Aerosol Layer product (v4.10) for all available data in the period 2006-2016 [RD4].

The estimated error is given by the total uncertainty. It is calculated by propagation of the uncertainty of the different input parameters of the NN, augmented with a (conservative) 10% uncertainty to take into account errors in the NN [RD5]. The total uncertainty is estimated in absolute terms and is always positive, being obtained from the sum of the squares of the different contributions [RD4].

Table 2: Description and units of the Dust product available in the IASI L2 Dust HDF5 files

Name	Description	Units
Dust_OD	Dust plume optical depth	unitless
Dust_Err	Estimated error on dust plume optical depth	unitless
Dust_Z	Climatological altitude of dust plume	km
general_quality_flag	General quality flag	unitless

5.2 Using the product

5.2.1 General quality flag

general_quality_flag = 0 if:

- Dust_OD < -0.1 or hyperspectral dust index (R, see section 3.2) < -3
- conversion ratio (CR, see section 3.2) > 0.15
- Dust_Err > 0.15 and (Dust_Err/Dust_OD)*100 > 50%

general_quality_flag = 1 for all the rest.

5.2.2 Data filtering

We recommend to filter out data for which the associated general quality flag is zero.

5.3 Product requirements

The product requirements are given in terms of threshold, target and optimal values in Table 3 below. This information is taken from the Dust product specification, requirement and assessment document [AD2] and is also given in the Product Requirements Document [AD3].

Table 3: Dust product requirements.

		Error*			Spatial resolution	Spatial coverage	NRT
		Threshold	Target	Optimal			
Dust O.D.		RE < 150 % or AE < 0.2	RE < 75 % or AE < 0.05	RE < 25 % or AE < 0.01	IASI pixel	Global	<3h

*difference of quantity value obtained by measurement and true value of the quantity intended to be measured, as defined by CEOS/ISO:19159 (ISO/TS 19159-1:2014(en), Geographic information - Calibration and validation of remote sensing imagery sensors and data — Part 1: Optical sensors).

5.4 Product dissemination and archiving

5.4.1 NRT Product dissemination

The IASI Level 2 products are disseminated to users in near real-time through EUMETCast [RD6] with a time lapse of two hours from sensing to delivery. The data are disseminated in HDF5 format. A full description of the IASI Level 2 Dust HDF5 content is given in Section 4.3.

5.4.2 Archive retrieval

The IASI Level 2 products available from the EUMETSAT Data Centre are archived as full orbits. The products in the EUMETSAT Data Centre are available in NetCDF format.